


**Application: Side mounted Level measurement in tanks, Flange mounted
(Compact version)**

Process connection: Flanged connection with strong flush diaphragm
All Flange sizes available (Please specify)

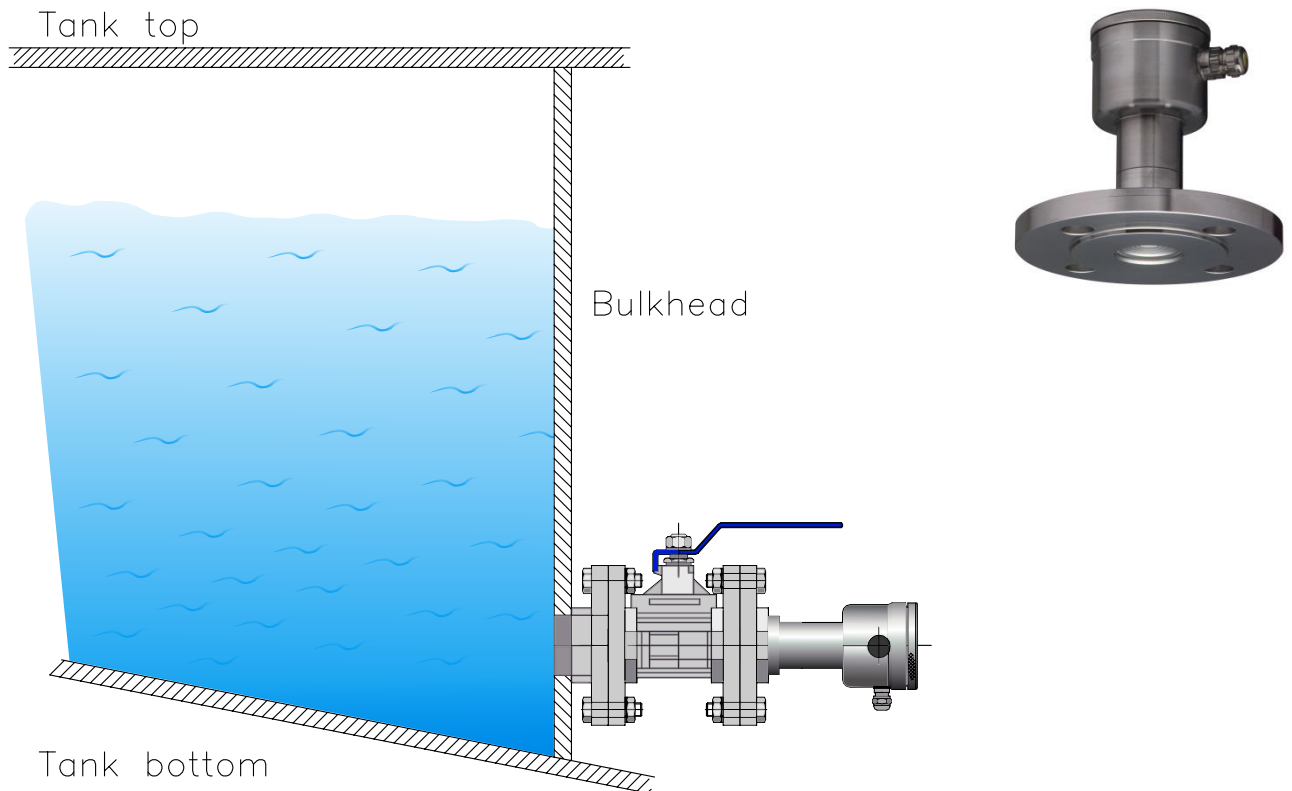

Order code: 8000-SAN-Range-F(size)

Range: Adjustable (Many ranges available)

Accuracy: 0.2 %

Output: 4-20 mA / 2-wire

Protection: IP66 (Option IP68)

Certificates: ATEX and IECEx (Option, code: Ex)

Marine Type Approvals: ABS, DNV, Lloyds, Bureau Veritas and RINA (Code: G104)

Wetted parts: SS 316L

Flush diaphragm material: SS316L (Option: Hastelloy-C or Gold plating (Ballast level))

Process connection: Flange (SS 316L) all sizes available in DIN, ANSI or JIS (Specify size)

For Level measurement in Ballast tanks we recommend to use a Gold plated diaphragm.

Please add option code G16 at the end of the order code

