


**Application: Side mounted Level measurement in tanks (IP68) Flange mounted**

**Process connection:** Flanged connection with strong flush diaphragm  
All Flange sizes available (Please specify)

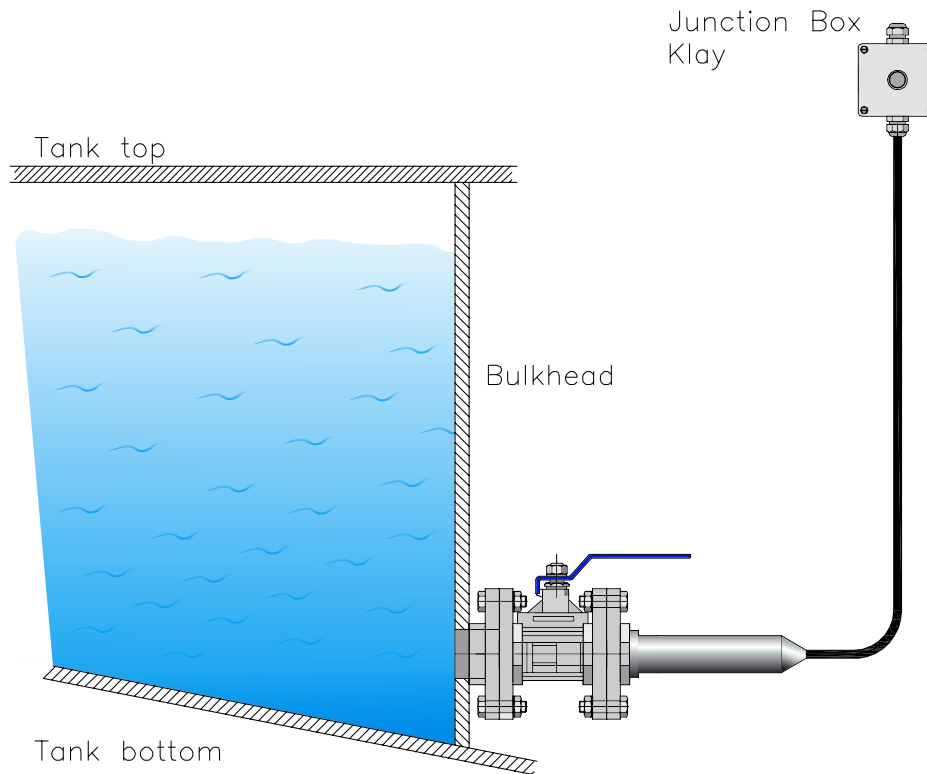

**Order code:** Hydrobar-Cable(3m)-FR-Range-F(size)

**Range:** Fixed (not adjustable) All ranges available

**Accuracy:** 0.2 %

**Output:** 4-20 mA / 2-wire

**Protection:** IP68

**Certificates:** ATEX and IECEx. Marine Type Approvals (ABS, DNV, Lloyds, Bureau Veritas, RINA)

**Wetted parts:** SS 316L

**Flush diaphragm material:** SS316L (Option: Hastelloy C or Gold plating (Ballast level))

Strong 'vented' cable, diameter 10 mm.

**Cable material:** PE Polyethylene (standard) or Hytrel/Arnitel (Option, code G10).

**Process connection:** Flange (SS 316L) All sizes available in DIN, ANSI or JIS. (Specify size)

***For Level measurement in Ballast tanks we recommend to use a Gold plated diaphragm.***

***Please add option code G16 at the end of the order code***

