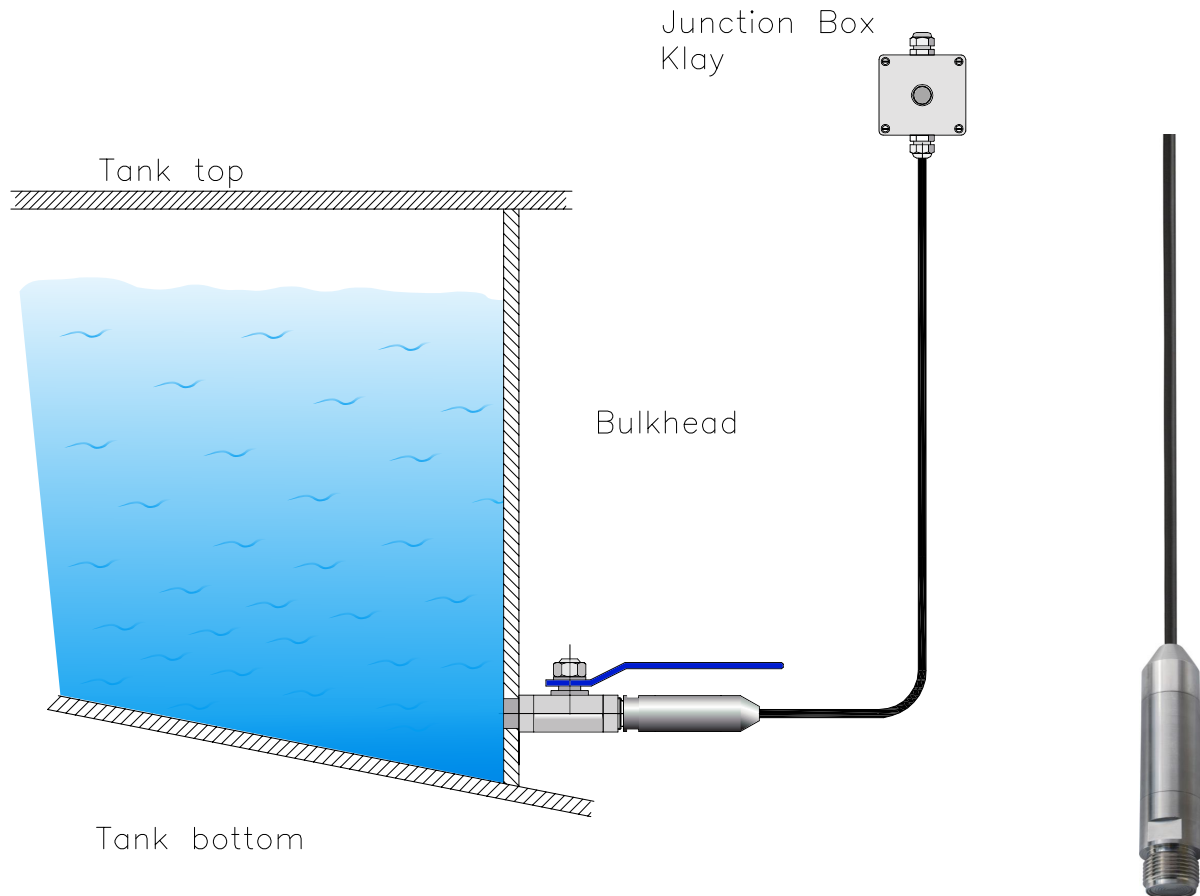


**Application: Side mounted Level measurement in tanks**
**Process connection:** G1" threaded (screwed) connection with flush diaphragm

**Order code:** Hydrobar-Cable(3m)-FR-Range-G54

**Range:** Fixed (not adjustable) All ranges available

**Accuracy:** 0.2%

**Output:** 4-20 mA / 2-wire

**Protection:** IP68

**Certificates:** ATEX and IECEx (Option, code: Ex)

**Marine Type Approvals:** ABS, DNV, Lloyds, Bureau Veritas, GL and RINA (Code G104)

**Wetted parts:** SS316L

**Flush diaphragm material:** SS316L (Option: Hastelloy C or Gold plating (Ballast level))

Strong 'vented' cable, diameter 10 mm.

**Cable material:** PE Polyethylene (standard) or Hytrel/Arnitel (Option code: G10).

***For Level measurement in Ballast tanks we recommend to use a Gold plated diaphragm.***
***Please add option code G16 at the end of the order code.***
