




SUBMERSIBLE LEVEL TRANSMITTERS

HYDROBAR


- ▶ ACCURACY 0,2%
- ▶ STRONG DIAPHRAGMS
- ▶ PERFECT LONG TERM STABILITY (< 0,1%/year)
- ▶ TEMPERATURE COMPENSATED
- ▶ ZERO/SPAN ADJUSTABLE
- ▶ INTRINSICALLY SAFE
ATEX  II 1 G Ex ia IIC T4 Ga

DESCRIPTION

The “Hydrobar” series are submer-sible level transmitters with a cable or SS tube extension, to measure the level in water-works, deep wells, underground tanks, concrete bunkers, etc.

The “Hydrobar” transmitters are available as fixed range (type FR units), or with adjustable zero and span.

All transmitters are fully temperature compensated, and are equipped with strong flush mounted diaphragms who are laser-welded, this results in a **perfect long term stability.**

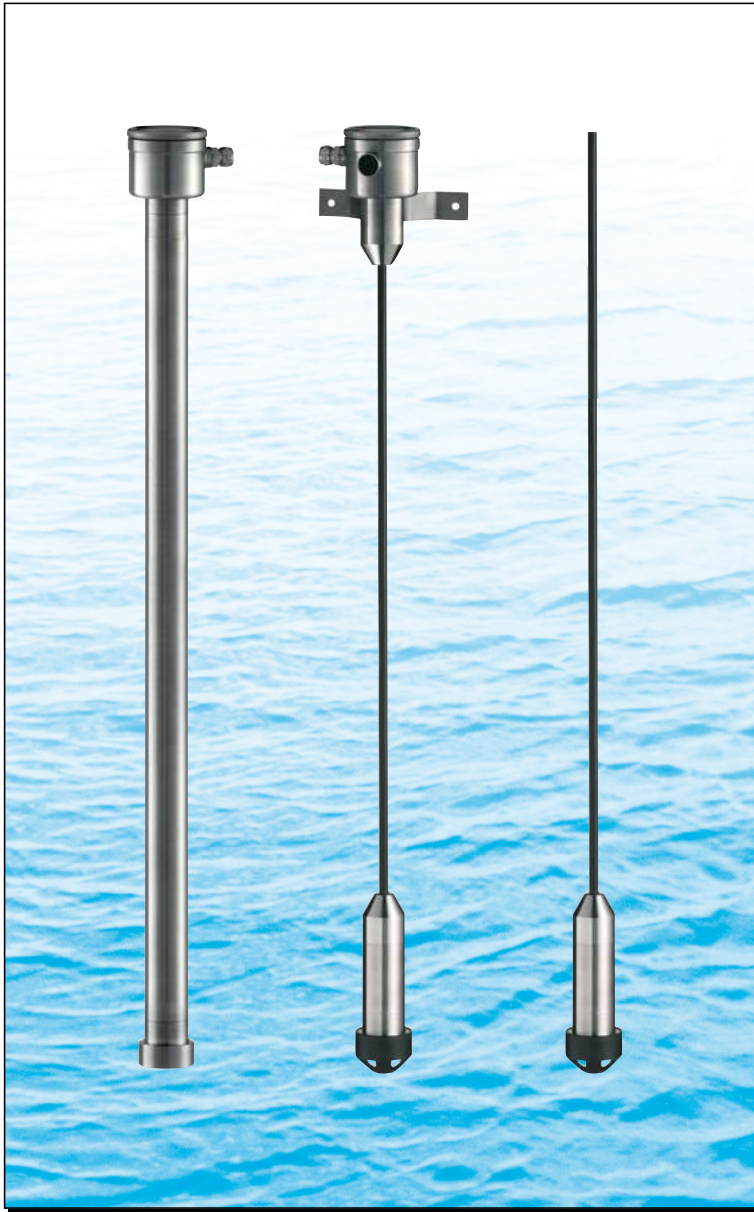

Made by:

 **KLAY-INSTRUMENTS B.V.**

Nijverheidsweg 5
P.O. Box 13
Tel. +31-521-591550

7991 CZ DWINGELOO
7990 AA DWINGELOO
Fax +31-521-592046

The Netherlands
E-mail: info@klay.nl
Website: www.klay-instruments.com

Our representative in your area is:

SPECIFICATIONS

Measuring ranges	: 40"WC to 1600"WC
Output signal	: 4-20 mA, 2-wire
Adjustment	: Zero and span internally (not for FR type)
Overall accuracy	: 0,2% of adjusted span
Power supply	: 12 to 36 Vdc (Exi: 13-26,5 Vdc)
Electrical connection	: PG9, 1/2" NPT or M20 x1.5
External load (max.)	: 550 Ohm/24 V to 1400 Ohm/40 Vdc
Protection grade	: NEMA 6P (IP68) / NEMA 4X
Process temperature	: 14° to 158°F
Temperature sensitivity	: +/- 0,015%/K
Wetted parts	: AISI 316L (standard)
Material cable	: Polyethylene (PE) (option: Hytrel or PTFE)



Flush diaphragm

Specifications can change without notice

SERIES HYDROBAR						
	Type code:	Hydrobar-Cable-FR	Hydrobar-Cable	Hydrobar-Cable-F	Hydrobar-EXTD	Hydrobar-EXTD-F

Detailed drawings available on request

ORDERING CODES

Order code cable extension:*		Hydrobar-cable (length) -							
Order code SS extension:*		Hydrobar-EXTD (length) -							
Measuring Ranges (Inch WC)	Maximum overpressure (PSI)	Adjustable span range (Inch WC)							
0 - 40 ...160"WC	93	0 - 40 to 0 - 160	B	↑	↑	↑	↑	↑	↑
0 - 160...275"WC	93	0 - 160 to 0 - 275	C						
0 - 275 ...590"WC	150	0 - 275 to 0 - 590	D						
0 - 390 ...1600"WC	230	0 - 390 to 0 - 1600	E						
Fixed range: Specify calibrated range (only Hydrobar-cable)			FR						
- Mounting connection: Flange DIN or ANSI (specify size)				F					
- Special mounting connections: Example 1 1/2" or 2" NPT (specify)				X					
- Digital local indicator 3 1/2 digit, programmable				I					
- Intrinsically safe: ATEX II 1 G Ex ia IIC T4 Ga and IECEx							EX		
- SPECIALS: Other wetted parts (Hast.C or gold plated) or other cable material (Hytrel or PTFE) (specify)								G	

* Always specify cable or SS extension length at order code

GENERAL INFORMATION

Laser welded diaphragms: All Hydrobar level transmitters consist of a strong, flush mounted diaphragm, which are laser welded.
Temperature compensation: All Hydrobar transmitters are fully temperature compensated.
EMC/CE: Klay Instruments manufactures all transmitters according to the new EMC/CE regulations.

ACCESSORIES



Cable clamp
Art. no. 20636



Junction Box FMD(IP67)
Art. no. 20171